

Parts List

ALTERNATE PARTS LIST	
A04601	DIAPHRAGM - TEFLON/EPDM
A04611	DIAPHRAGM - 3 PLY TEFLON

ADC-194 01/29/21

ITEM	QTY	PART #	DESCRIPTION
1	1	A01647	ADAPTOR PLATE
2	1	A02002	BASE
3	1	A02017	ROD BOLT
4	4	A02038	BOLT-MOTOR
5	1	A02610	BEARING
6	1	A02611	BEARING
7	1	A02633	SHAFT BUSHING
8	1	A03601	CAP
9	1	A03602	COUNTERWEIGHT
10	1	A05601A	ECCENTRIC
11	4	A06001	FOOT
12	1	A06606	ACCESS PLUG
13	1	A08602	HOUSING
14	1	A08603	HEAD
15	1	A13052	MOTOR
16	4	A14001	CAP NUT
17	4	A14009	NUT
18	1	A16601	DIAPH. PLATE
19	1	A16607	COVER PLATE
20	1	A16608	COVER, HEAD
21	1	A18601	CONROD
22	1	A18602	TOL. RING
23	1	A18603	TOL. RING
24	4	A19005	SCREW
25	1	A19007	PLATE SCREW
26	4	A19009A	SCREW
27	1	A19010	SET SCREW
28	10	A19013	SCREW
29	1	A19017	SCREW
30	4	A19037	SCREW ADAPTOR
31	4	A19605	HEAD BOLT
32	3	A19651	ROLL PIN
33	4	A23004	WASHER
34	1	*A04601	DIAPHRAGM
35	1	*A07601	GASKET
36	2	*A22002	4-40 SCREW
37	2	*A22601	VALVE
38	1	*A22605	VALVE STOP
39	1	*A23001	WASHER


*RECOMMENDED SPARE PARTS KITS

DIAPHRAGM KITS	
11605	TEFLON/EPDM
11611	3-PLY TEFLON

INCLUDES ITEMS 34-39

MOTOR DESCRIPTION:

A13052 .25kW 115/230V 50/60Hz 1Ph

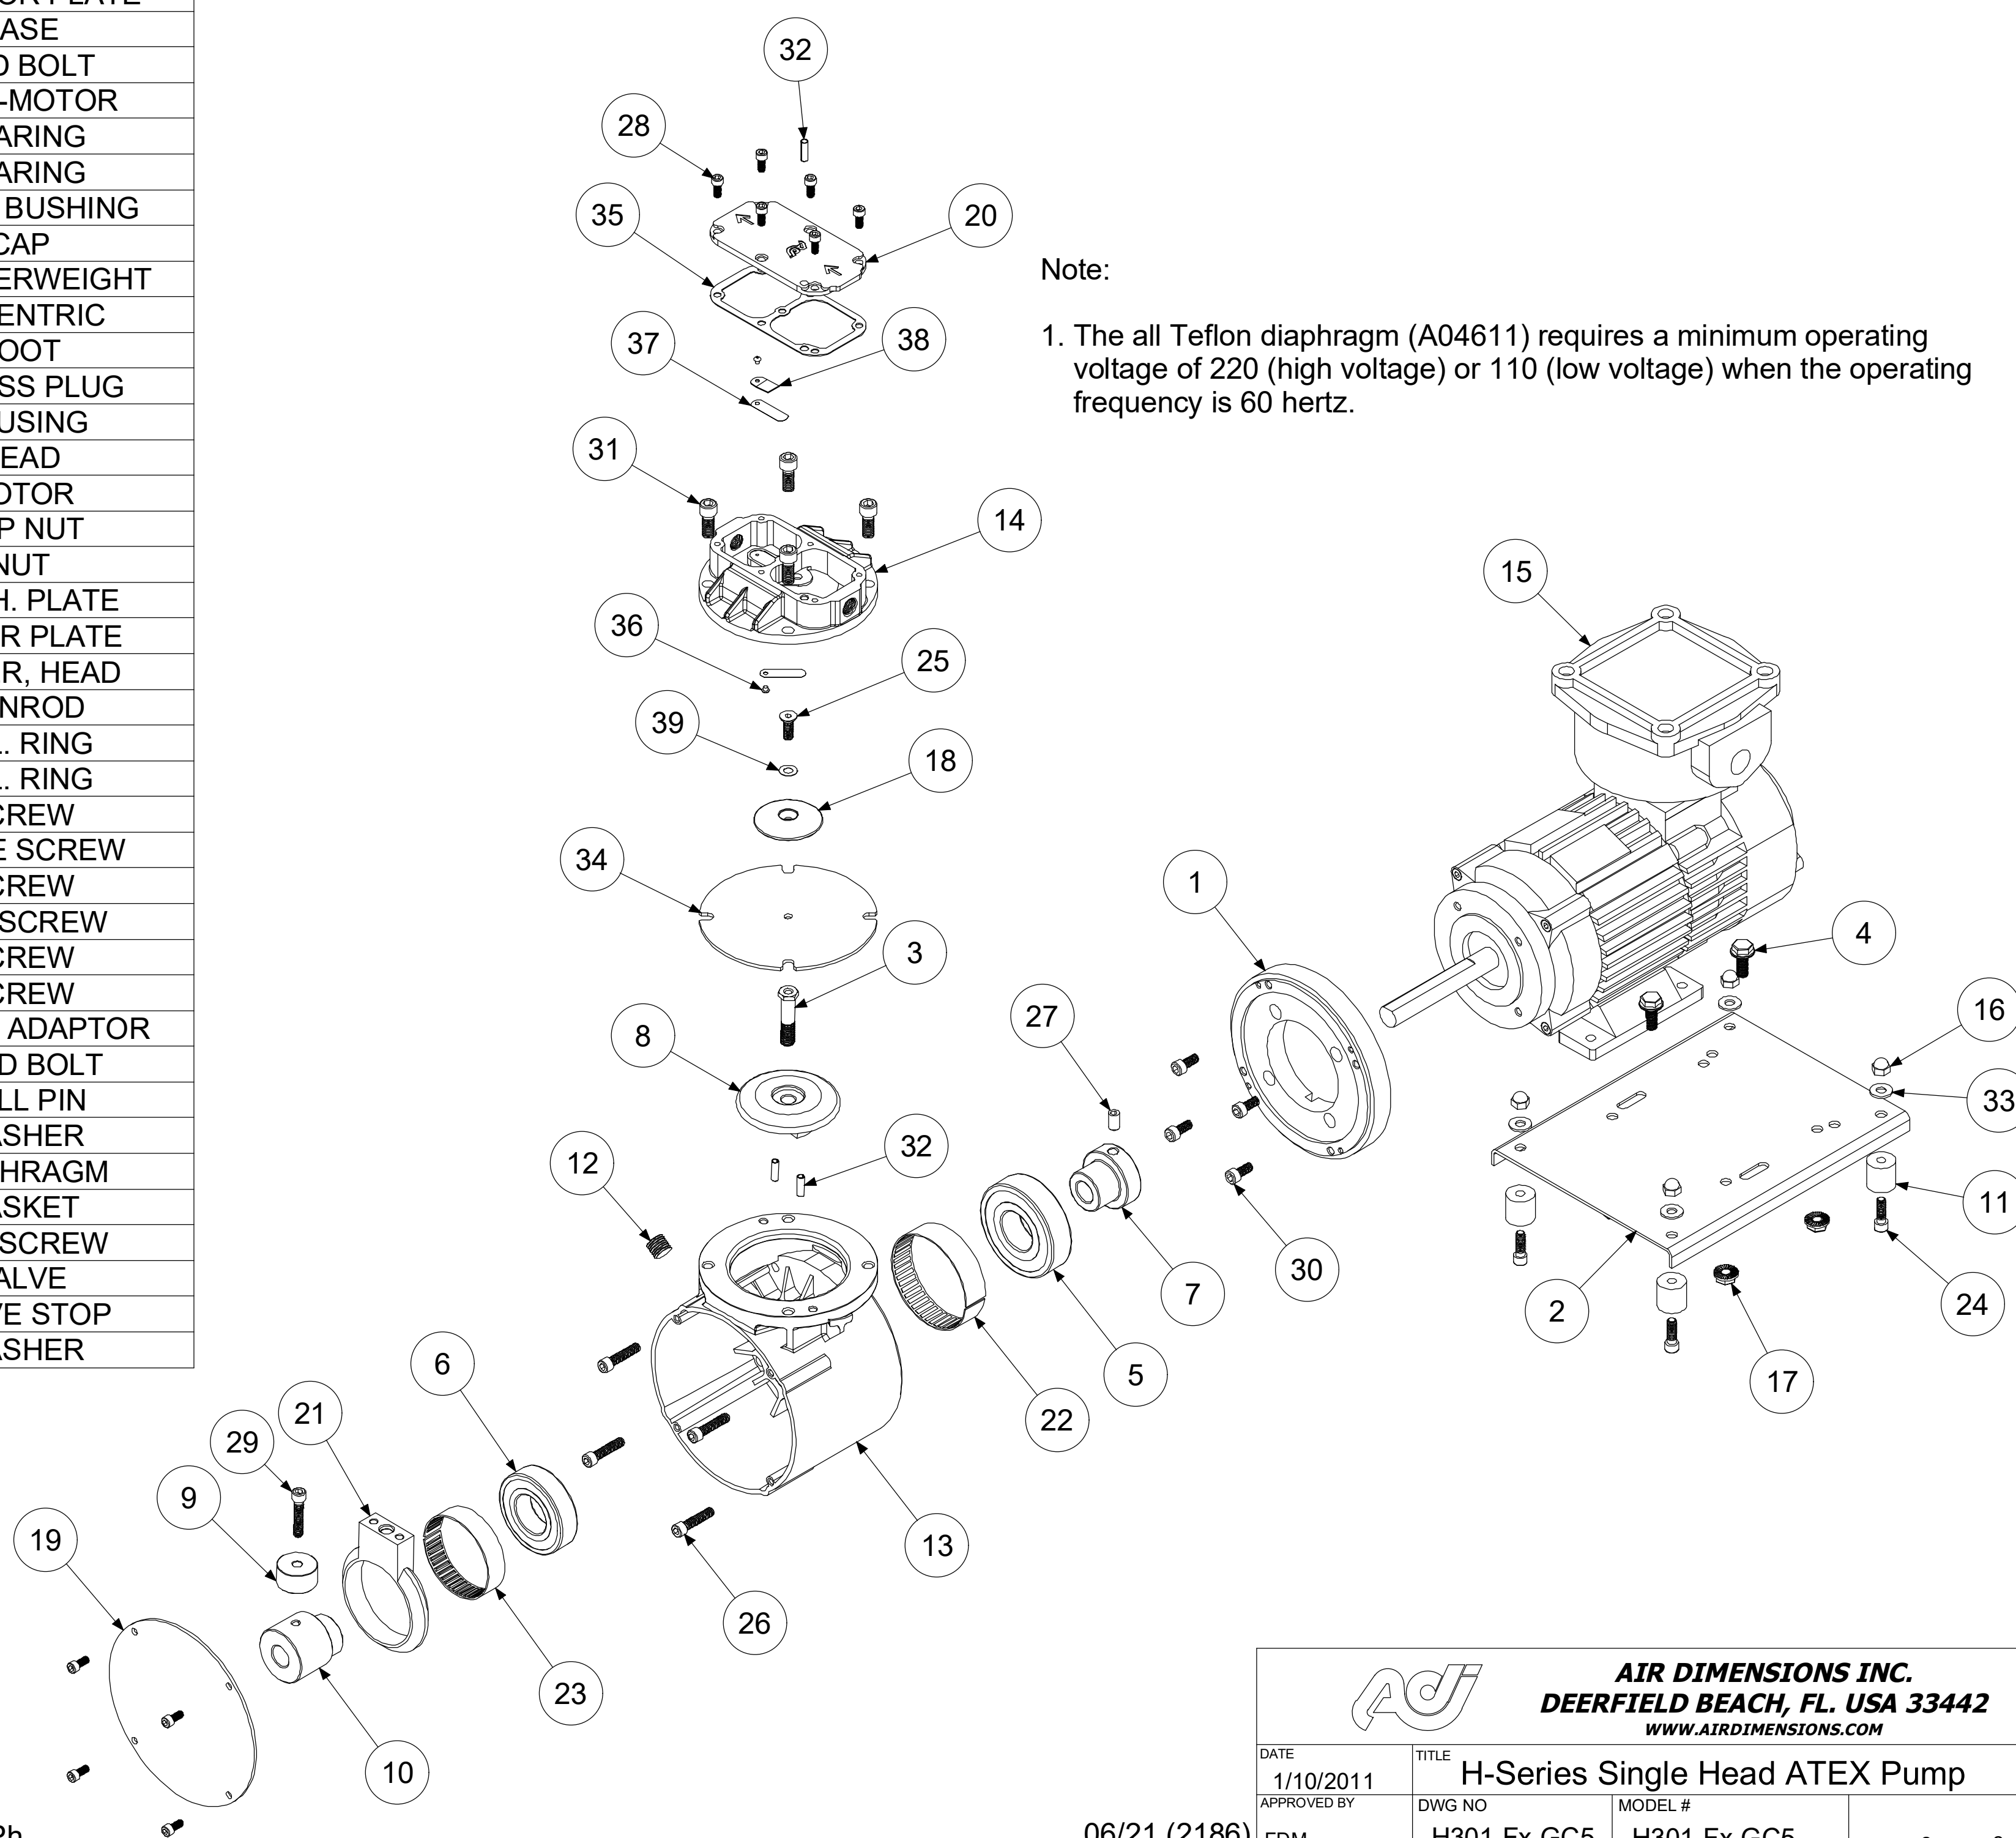

Note:

1. The all Teflon diaphragm (A04611) requires a minimum operating voltage of 220 (high voltage) or 110 (low voltage) when the operating frequency is 60 hertz.

		AIR DIMENSIONS INC. DEERFIELD BEACH, FL. USA 33442 WWW.AIRDIMENSIONS.COM	
DATE	1/10/2011	TITLE	H-Series Single Head ATEX Pump
APPROVED BY	FDM	DWG NO	H301-Fx-GC5
		MODEL #	H301-Fx-GC5
		SHEET 2 OF 2	

06/21 (2186)